


Supplemental Digital Content 4: Supplemental Figure 1. The receiver operating characteristic curve of the STAGE score after internal validation.

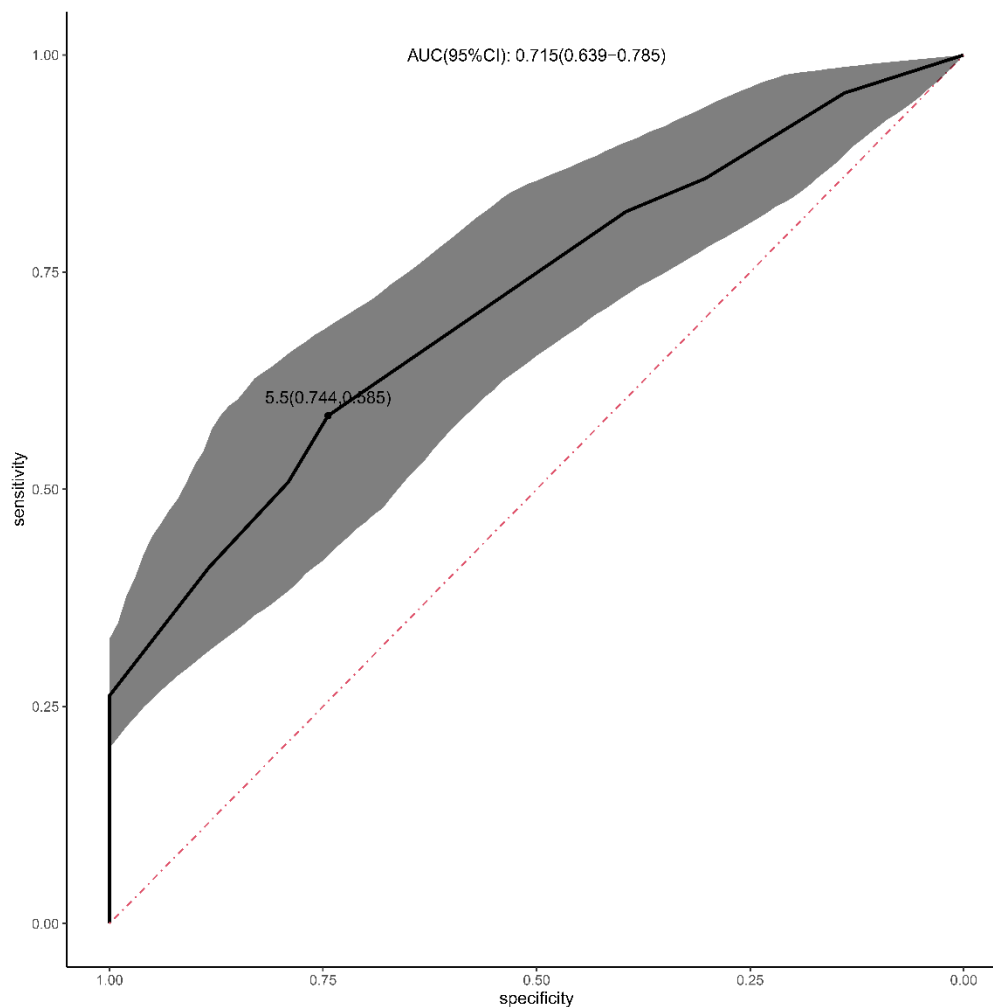

After internal validation using bootstrap methods, AUC was 0.71 (95%CI: 0.64 to 0.79).

The cutoff point was 5.5 with 59% (95% CI: 51% to 66%) sensitivity, 74% (95% CI: 59% to 86%) specificity, 90% (95% CI: 84% to 95%) positive predictive value, and 30% (95% CI: 21% to 39%) negative predictive value.

AUC, Area under the receiver operating characteristics curve.